

SAF Air Filter

If you have any questions relating to this or any of our products, please do not hesitate to contact us.

General Specification


These air filters are suitable for installing on the air intakes of diesel engines, air compressors and air blowers. Three types of filter can be supplied. The dimensions in each case are the same and the elements are interchangeable.

Type SAF-F

A polyurethane foam element. This easily cleaned porous foam element has a high dust retention capacity and gravimetric efficiency of 96-99% with BS Test Dust No. 2

End Connectors

Screwed BSP connectors are fitted to sizes 6 - 76mm nominal bore (1/4" - 3") and flanges to BS10 Table D on all larger sizes. Different types of flanges or end connectors can be supplied on special quotation.

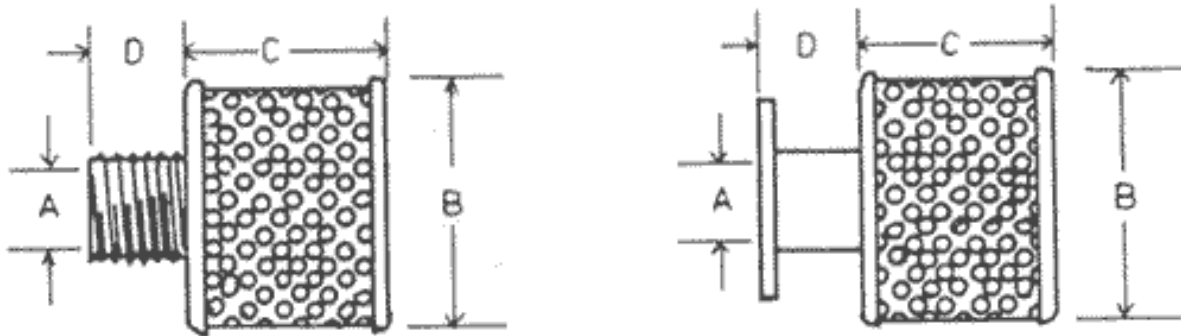

UAI - SERVAIS SILENCERS, FORDHOUSE ROAD, BUSBURY, WOLVERHAMTON WV10 9DZ
Telephone: +44 (0) 1902 307799 Fax: +44 (0) 1902 721026

SAF Air Filter

Nominal Bore (A)	Diameter (B)	Length (C)	(D)	Capacity Free Air m ³ /min
6 (¼")	76 (3")	35 (1 3/8")	13	0 - 0.08
10 (3/8")	76 (3")	35 (1 3/8")	13	0 - 0.08
13 (½")	76 (3")	35 (1 3/8")	19	0.08 - 0.17
19 (¾")	76 (3")	35 (1 3/8")	19	0.17 - 0.33
25 (1")	95 (3¾")	86 (3 3/8")	19	0.33 - 0.60
32 (1¼")	121 (4¾")	86 (3 3/8")	25	0.60 - 0.8
38 (1½")	121 (4¾")	86 (3 3/8")	32	0.8 - 1.4
51 (2")	140 (5½")	86 (3 3/8")	38	1.4 - 2.4
64 (2½")	140 (5½")	86 (3 3/8")	44	2.4 - 3.8
76 (3")	178 (7")	137 (5 3/8")	48	3.8 - 5.4
89 (3½")	178 (7")	137 (5 3/8")	51	5.4 - 7.1
102 (4")	203 (6")	162 (6 3/8")	51	7.1 - 10
127 (5")	254 (10")	187 (7 3/8")	51	10 - 15
152 (6")	279 (11")	227 (9")	76	15 - 22
178 (7")	356 (14")	289 (11 3/8")	76	22 - 30
203 (8")	406 (16")	346 (13 3/8")	76	30 - 40
229 (9")	457 (18")	492 (19 3/8")	76	40 - 50
254 (10")	508 (20")	492 (19 3/8")	76	50 - 60

Note (i) all dimensions in millimetres

If you have any questions relating to this or any of our products, please do not hesitate to contact us.

UAI - SERVAIS SILENCERS, FORDHOUSE ROAD, BUSBURY, WOLVERHAMTON WV10 9DZ
Telephone: +44 (0) 1902 307799 Fax: +44 (0) 1902 721026

www.servais.co.uk